

TRIPLE ECCENTRIC BUTTERFLY VALVE, AJ CRYOGENIC H2

Metal seated, DN 100-1500, PN10-PN250/ASME cl.150-ASME cl.1500

985/016-000, 985/026-000,
985/036-000, 985/046-000,
985/056-000

Energy

Chemical Processing

Triple eccentric butterfly valve, metal seated, available in Wafer, Lug, Flanged short pattern, Flanged long pattern and Buttwelded ends. Different body, disc and seal materials are available and specifically evaluated for hydrogen service, ensuring reliable performance. The valves are engineered with an advanced triple-eccentric geometry to ensure precise, low-torque operation even in demanding applications. The internal design features smooth, streamlined geometries without sharp edges, optimised for hydrogen service. The metal-to-metal sealing system provides reliable tightness with minimal wear and exceptional durability throughout the valve's service life. Dedicated material and hydrogen testing validate performance for high-pressure H₂ applications, with bi-directional isolation and control capability.

Product description:

AJ Cryogenic Hydrogen triple eccentric butterfly valve for critical applications with temperatures down to -254 °C.

Standards:

- Design Standards: API 609 Cat. B, EN 593, ASME B16.34, EN12516, ASME B31.12
- Face-to-face dimension according to: EN 558, ISO 5752, API 609, ASME B16.10
- Flange drilling according to: ASME B16.5, ASME B16.47, EN1092-1, ISO 7005
- Buttwelded ends according to: ASME B16.25

Tests/Approvals:

- Testing: BS6364, ISO 28921-1, API 598, ISO 5208, EN 12266-1, IEC 60534-4, ISO 15848-2
- API 609 MONOGRAM
- Fire tested to: API 607, ISO 10497
- Cryogenic prototype testing: ISO 28921-2, API 6D Appendix M
- Compliance with: Pressure Equipment Directive 2014/68/EU, ATEX Directive 2014/34/EU
- SIL assessment: according to IEC 61508 (PFD values up to the SIL 3 range with full and partial stroking test)
- Fugitive Emissions: ISO 15848-1, IOGP S-562 & IOGP S-611, API 641
- For the Chinese market: SELO licence for the quality system, TSG for Primary and Cryogenic configurations

Features:

- Triple eccentric, friction-free sealing geometry minimising wear on metal sealing surfaces
- Cavity-free body design preventing media entrapment
- Bi-directional or uni-directional tight shut-off capability
- Streamlined flow path engineered for high Cv and reduced pressure loss
- One-piece, high-strength stem for precise disc alignment
- Extended bonnet
- Solid metal seal ring configurations for demanding temperature and pressure conditions
- Integral anti-blowout stem system
- Low fugitive-emission packing system
- Intrinsically fire-safe design
- Intrinsically antistatic construction ensuring safe operation in potentially explosive atmospheres

Accessories:


Gearbox, pneumatic, hydraulic and electric actuators, position indicators, solenoid valves, positioners




Wafer
STV 985/016-000



Lug
STV 985/026-000



Flanged short pattern
STV 985/036-000



Flanged long pattern
STV 985/046-000



Buttwelded ends
STV 985/056-000



SIL

CE




The designs, materials and specifications shown are subject to change without notice. This is due to the continuous development of our product programme.

TRIPLE ECCENTRIC BUTTERFLY VALVE, AJ CRYOGENIC H2

Metal seated, DN 100-1500, PN10-PN250/ASME cl.150-ASME cl.1500

985/016-000, 985/026-000,
985/036-000, 985/046-000,
985/056-000

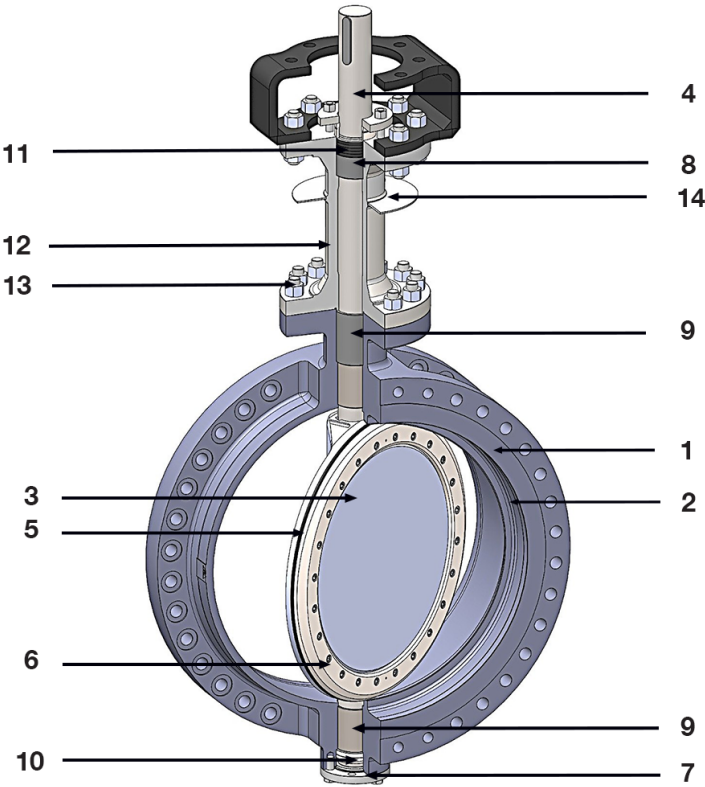

Components:

1. Body	Stainless steel	8. Packing	Graphite with reinforcement (Stainless steel or Inconel)
2. Seat	Hard facing: ErCoCr-E	9. Radial bearings	Stainless steel
3. Disc	see body materials	10. Axial bearing	see radial bearings
4. Shaft	Austenitic stainless steel	11. Anti-blowout gland	Stainless steel
5. Seal ring (solid)	Stainless steel	12. Extended bonnet	Stainless steel
6. Disc flange	Stainless steel	13. Stud bolts and nuts	Stainless steel
7. Bottom cover	Stainless steel	14. Collar drip plate (optional)	Stainless steel